



Designed for Drivers. Tailored for Fleets.



Flexible and scalable, AWD Class 2-5 Chassis Cabs, Cutaways and Vans that address multiple duty cycles and low downtime


	Class 2 Single Rear Wheel	Class 3 Single Rear Wheel	Class 4 Dual Rear Wheel	Class 5 Dual Rear Wheel
Payload (lbs)	up to 4,356	up to 6,657	up to 8,106	Up to 11,563
GVWR (lbs)	10,000	12,500	14,500	19,500
FGAWR (lbs)	5,060	5,720	6,380	7,480
RGAWR (lbs)	5,390	7,920	8,120	13,200
Wheelbase (in)	130, 160, 200	130, 160, 200	160, 200	160, 200
Turning Circle (ft)	38.2, 46.1, 54.0	38.2, 46.1, 54.0	46.1, 54.0	46.1, 54.0
Cab to Axle (in)	78.5, 108.5, 148.5	78.5, 108.5, 148.5	108.5, 148.5	108.5, 148.5
Rear Overhang (in)	35/60	35/60	60	60
Overall Height (in)	100	100	104	104
Cab Width (in)	82	82	82	82
Max Power (hp)	439	439	576	576
Max Torque (ft-lb)	6,247	6,247	9,174	9,174
Max Power (kW)	328	328	430	430
Battery Type	NMC	NMC	NMC	NMC
Battery Capacity (kWh)	82, 124, 165	82, 124, 165	82, 124, 165	82, 124, 165
Range (mi)	up to 250	up to 240	Up to 220	Up to 200
Charging Level	Level 1/2 Optional Level 3 / DCFC	Level 1/2 Optional Level 3 / DCFC	Level 1/2 Optional Level 3 / DCFC	Level 1/2 Optional Level 3 / DCFC



← Learn more about how to electrify your fleet today at viamotors.com

THE VTRUX[®] LINEUP

AN EV CHASSIS CAB SOLUTION THAT DELIVERS.

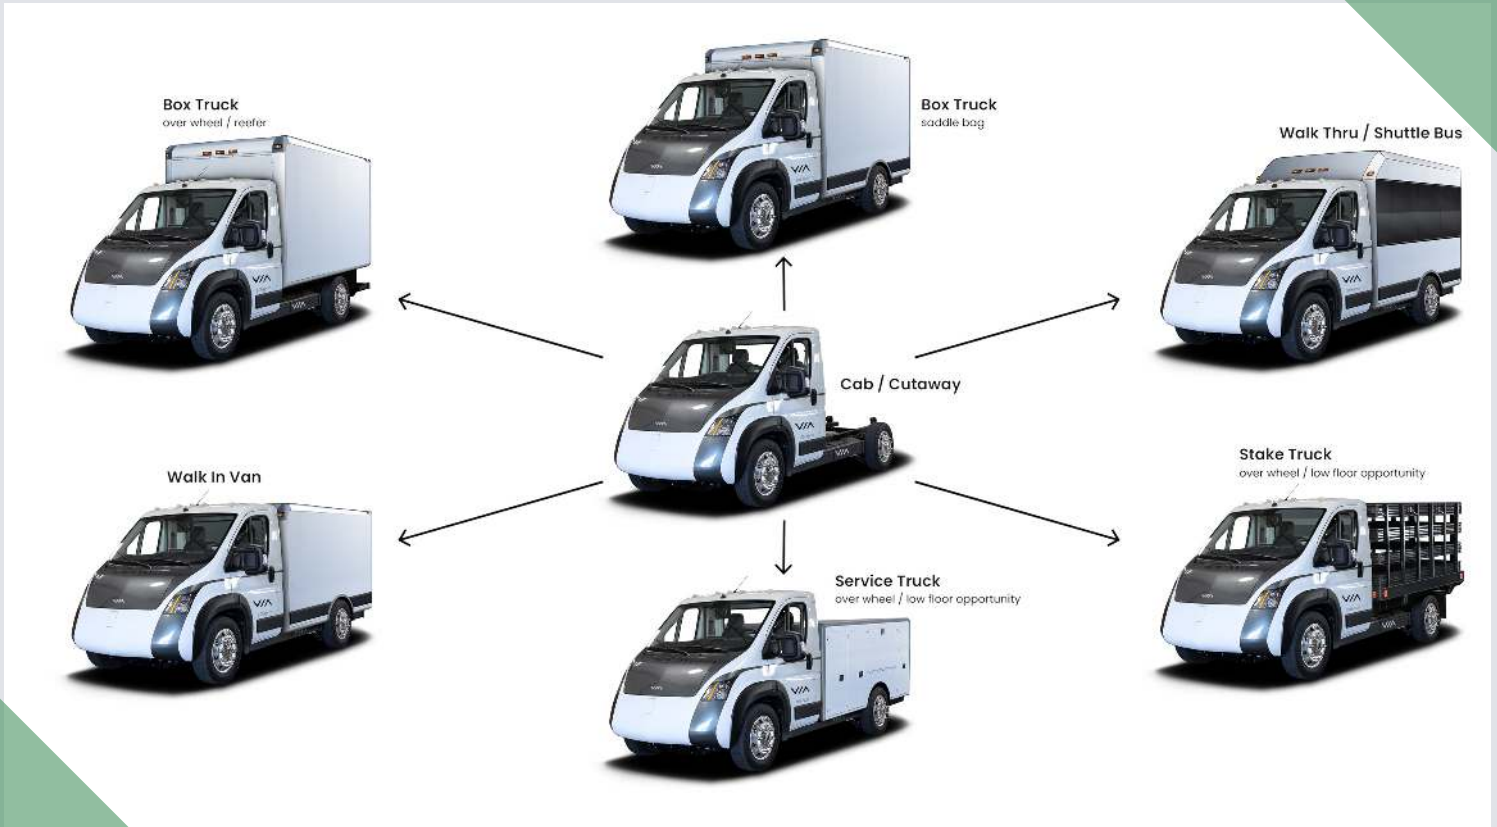


FULL SOLUTIONS FOR EV, FINANCING AND CHARGING



Class 2-5
Electric Chassis
Cabs & Platforms




Charging &
Infrastructure
Solutions



Telematics &
Diagnostics



Financing &
Leasing Options



Sales & Service
Network



sales@viamotors.com



Electrify your fleet today.
Learn more at viamotors.com

